POWERED BY PARKER 3,000 HP Land Drilling Rig

Year Modified: 2007

Rated Drilling Depth

5 in. Drill Pipe: 4-1/2 in. Drill Pipe:

Mast

Make, Type:

Height: Max. Hookload: Racking Capacity: Lee C. Moore, raised floor cantilever 154 ft (46.9 m) 1.3 million lbs 5 in. drill pipe - 268 stands 24,924 ft (7,596 m)

30,000 ft (9,140 m)

35,000 ft (10,668 m)

Drawworks

Make: Rated Input: Input Power:

Drilling Line:

OIME 3000E 3,000 hp (2,237 kW) Three (3) GE 752 electric motors, each rated 1,000 hp (746 kW) 1-5/8 in. (41.275 mm)

Traveling Equipment

Traveling Block: Max. Ideco 750T Load:

1.5 million lbs

Substructure

Make: Lee C. Moore Clear Working Height: 26 ft (7.9 m) Setback Load: 800,000 lbs

Rotary Equipment

Top Drive: Input Power:

Rotary Table:

BOP System

Varco TDS-4S, 650 ton GE 752 Hi-Torque series, rated 1,100 hp (820 kW) Continental Emsco T-3750; 37-1/2 in. (952.5 mm) Input from drawworks 1.3 million lbs

Input Power: Static Load Rating:

One (1) 21-1/4 in. Hydril MSP Annular Preventer: 2,000 psi psi 10,000 psi single ram

Ram Preventers:

One (1) 13-5/8 in. Hydril GK 5,000 One (1) 13-5/8 in. Cameron Type U One (1) 13-5/8 in. Cameron Type U 10,000 psi double ram



Energy. Well engineered.

Find out more at parkerwellbore.com ©2021 Parker Wellbore. All Rights Reserved.

2103 CityWest Blvd Suites. 300-400 Houston, TX 77042



Gensets Engines:

Generators:

Power Distribution

Gen. Control: SCR: MCC:

Mud Pumps

Pumps:

Input Power:

Mud Handling/Solids Control

Active Mud System: Shale Shakers:


Degasser:

1,500 bbls (238 m³) Five (5) Derrick FLC-504 4-panel shakers One (1) Derrick Hi-G Dryer; 1,200 gpm Swaco; 500 gpm

Note: Equipment subject to client-specific requirements. No part of this document may be reproduced or transmitted without prior consent of Parker Drilling. Rev 12/11

POWERED BY PARKER 3000 HP Land Drilling Rig

Rig Plot Plan

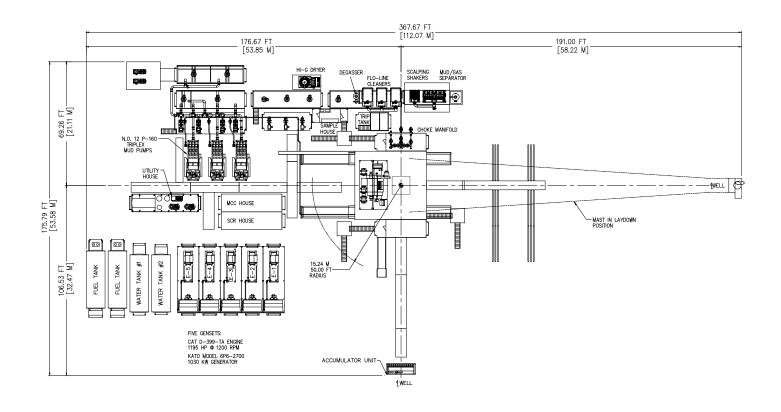

Note: Equipment subject to client-specific requirements. No part of this document may be reproduced or transmitted without prior consent of Parker Drilling. Rev 12/11